

NANOTECH

ASHI
EXIM INDIA LLP

VITRIFIED TILES
600x600mm



600x600mm
VITRIFIED TILES






Stripe



Agon

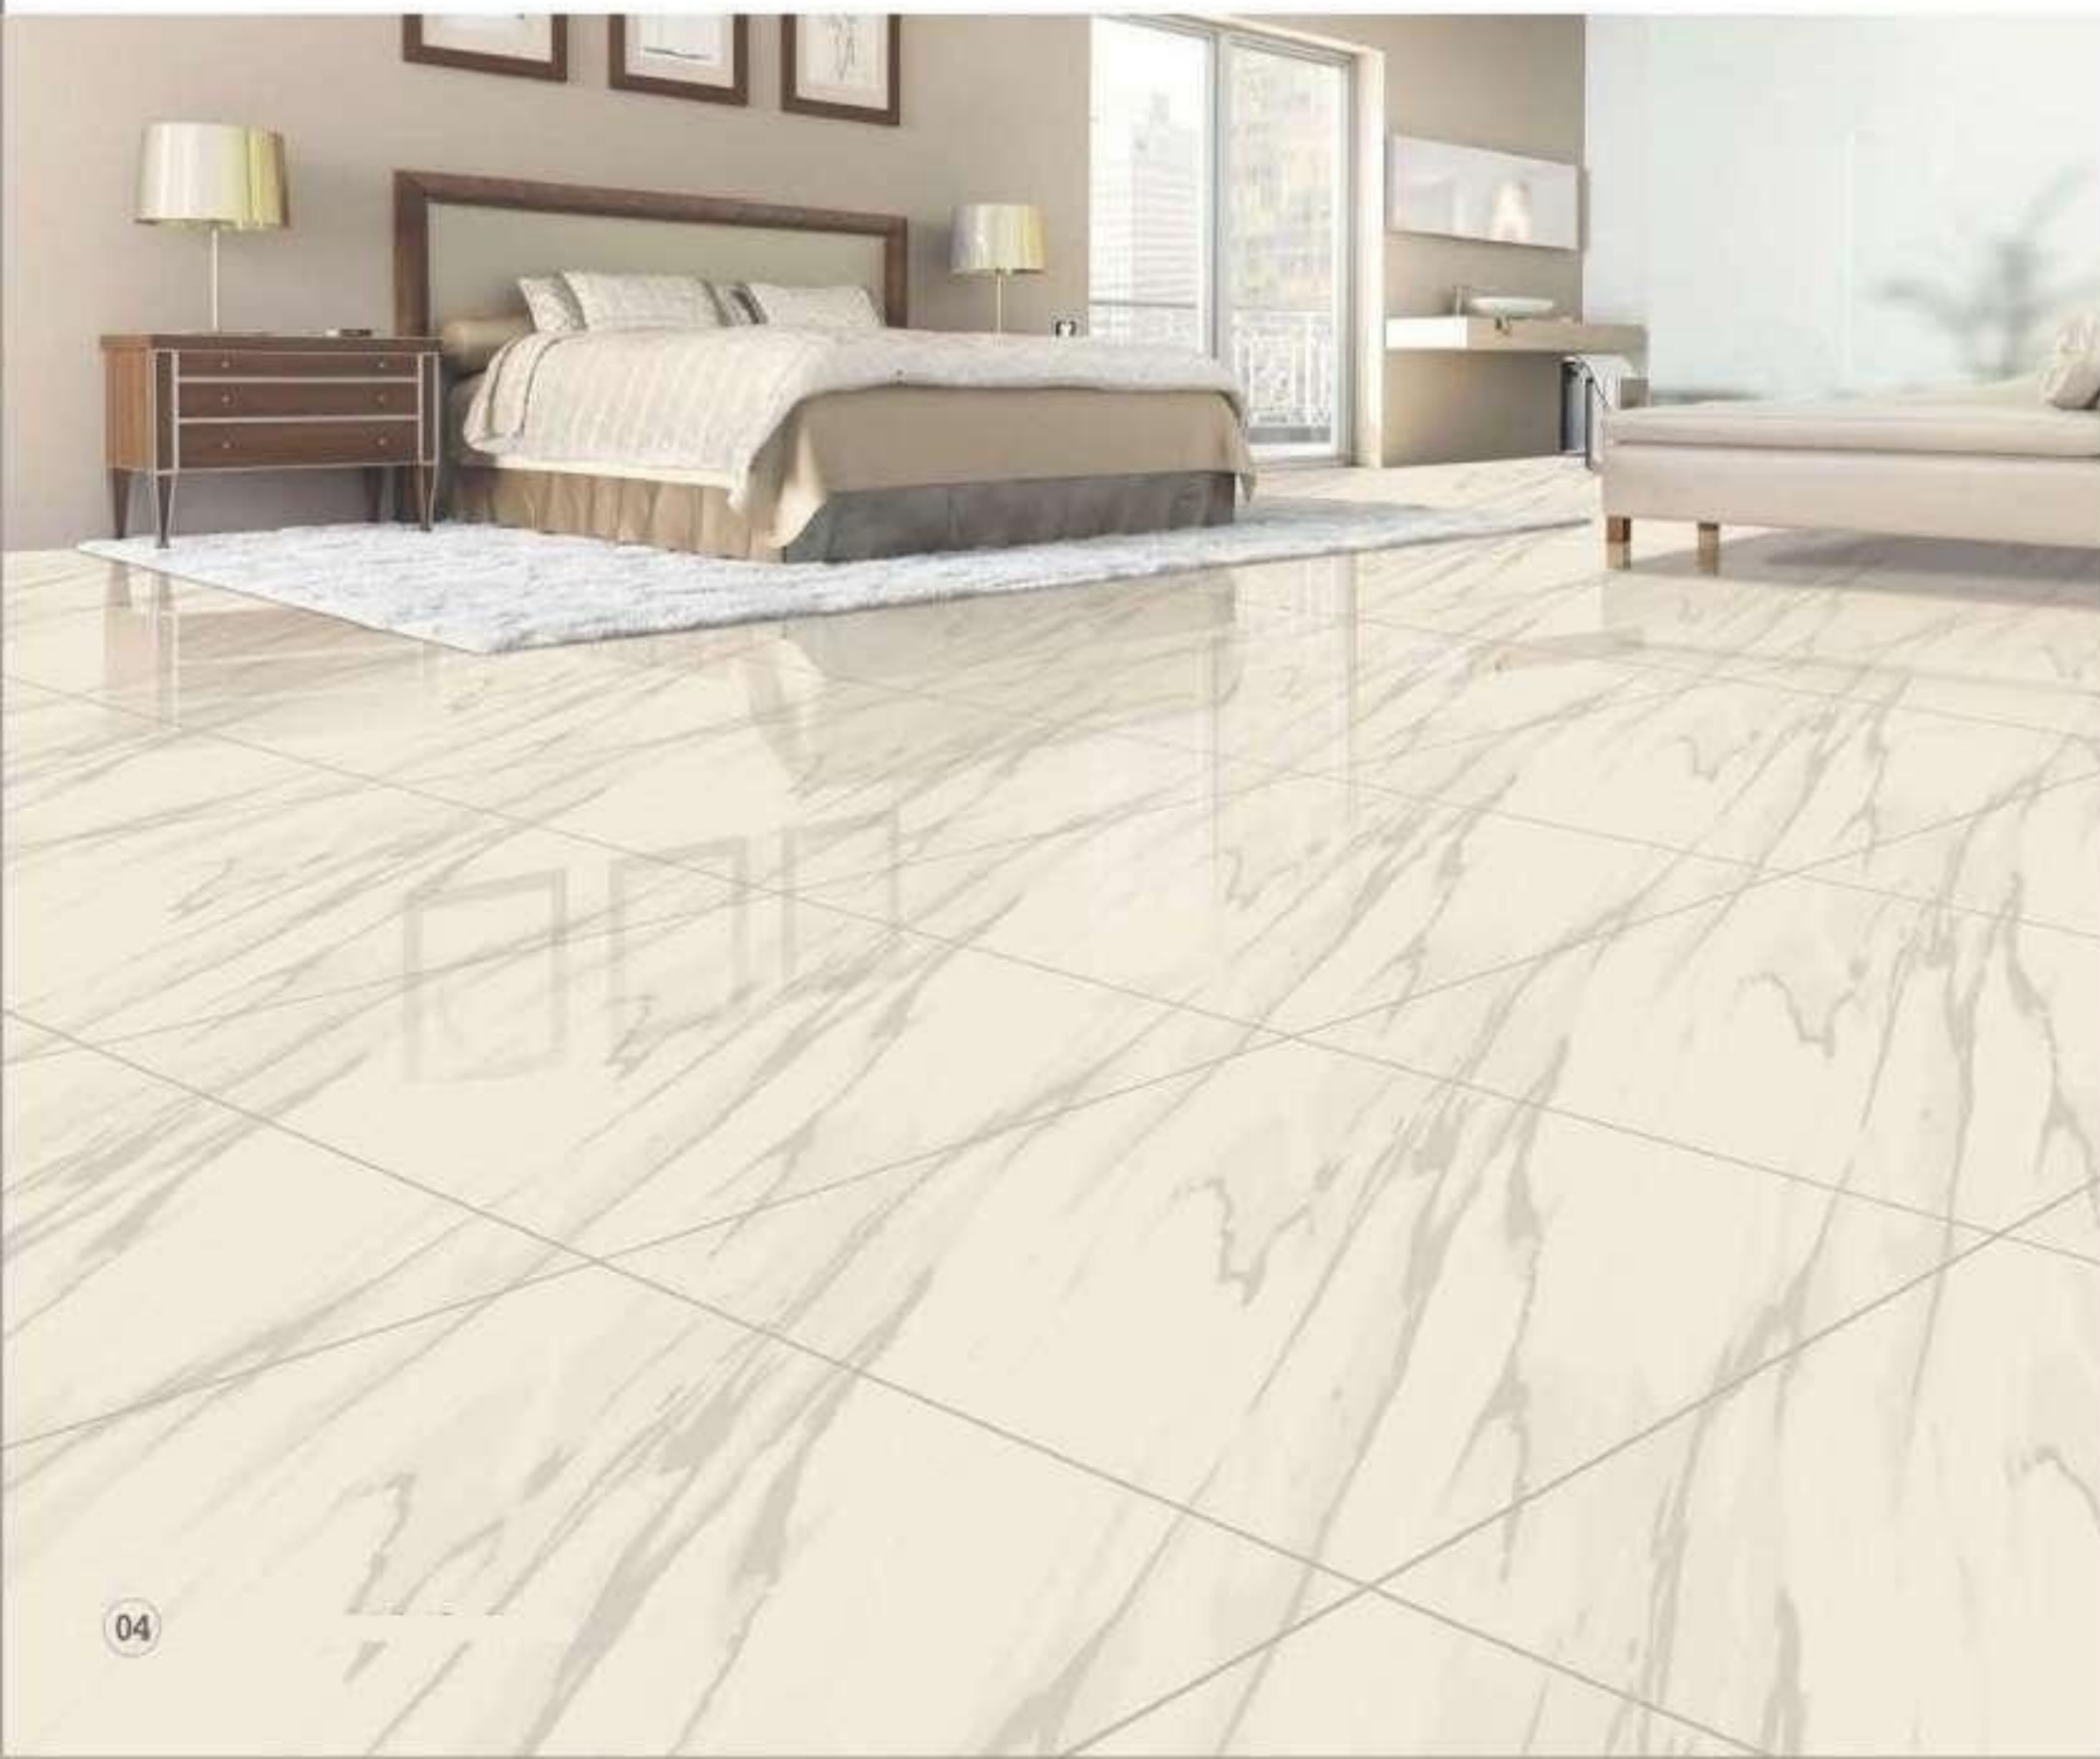

Mimoza



Mosco



VITRIFIED
TILES
600x600mm



Flower



Antique



Pietra



Marbito





VITRIFIED
TILES
600x600mm



Travr



Legno Gris



Liberty



Agatha



Gothic



Italiya



VITRIFIED
TILES
600x600mm



Orizia



Ebano Wood



Simero



Travertino






VITRIFIED
TILES
600x600mm




Speno



Murano

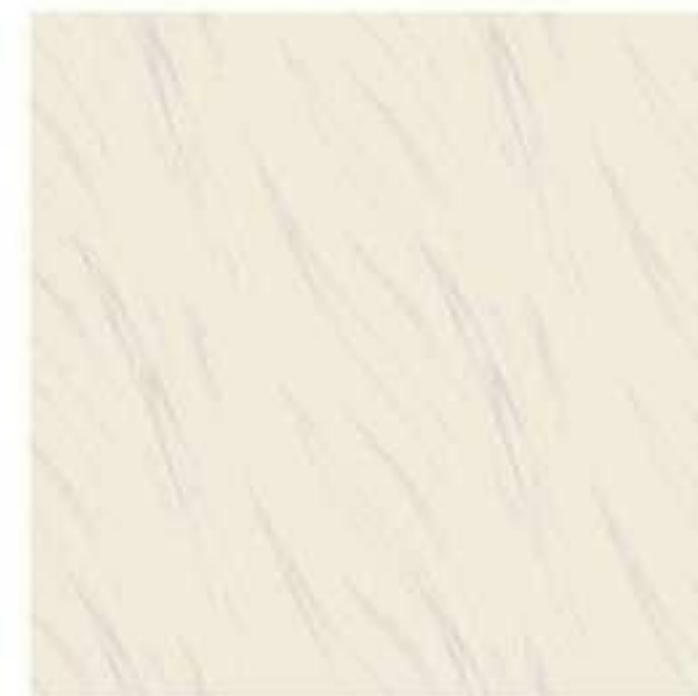

Sienna

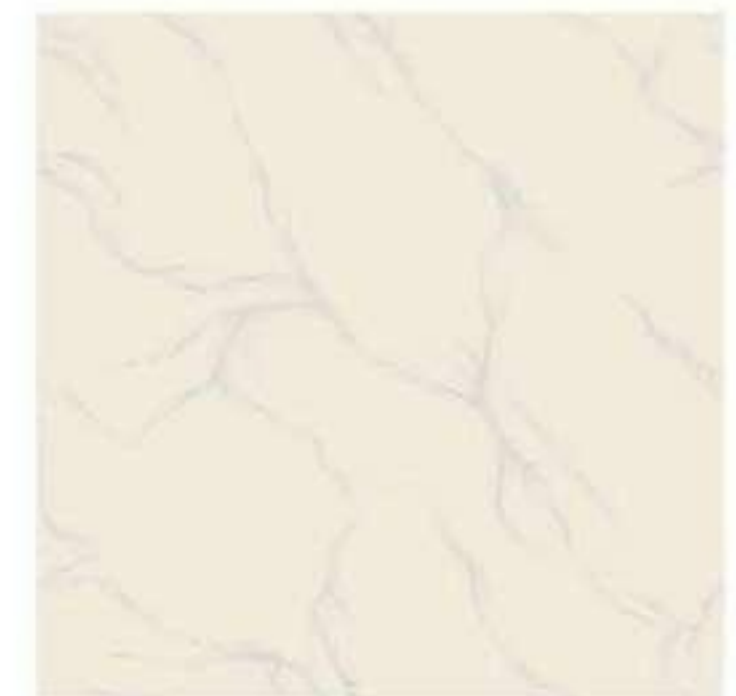

Decora

- High Gloss Finish
- Long Lasting Design
- Aesthetic Look
- Durable Product
- Eco-Friendly
- Water Absorption

VITRIFIED
TILES
600x600mm



Redison



Creta



Oslo Nut



Castilla



Olympia



Ivory Plain




Sr. No	PROPERTY	International Std. ISO 13006/EN 178 Group Bla	OUR VALUE	Method Of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5.0%	± 3.0%	EN 98
3.	Straightness of sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.2%	EN 98
6.	Water absorption*	< 0.5%	< 0.05%	EN 99
7.	Mohs hardness*	> 6	> 8	EN 101
8.	Flexural Straightness*	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion resistance	< 204 mm ²	< 144 mm ²	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength*	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 65% - 70% reflection	Glossmeter

PACKING DETAIL

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600 x 600 mm	8.5 mm (Approx)	4 pcs.	1.44 Sq. Mtr.	27 Kgs. (Approx)

APPLICATIONS

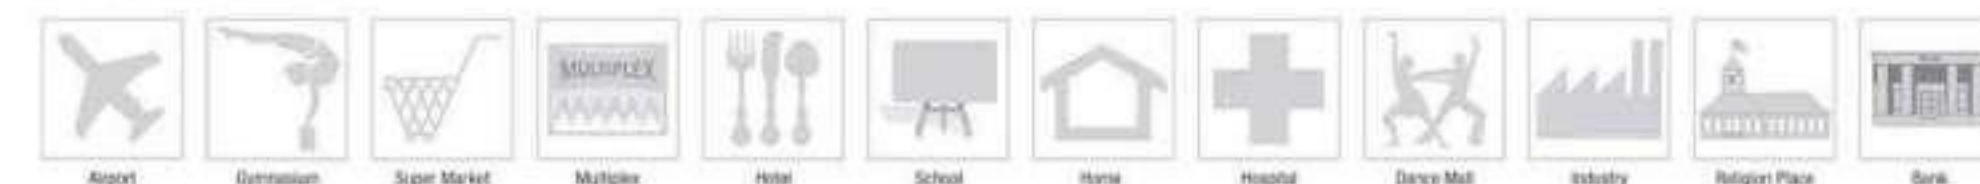

Note : Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.